

BAMWOOD[®]

COMPRESSED BAMBOO FLOORING

OUTDOOR FLOORING

BAMWOOD[®]

South Asian Resources Group (SARG) is proud to introduce the ultimate in outdoor bamboo decking product:

BamWood: Building on the innovative technology BamWood has density, strength and durability characteristics comparable to Brazilian IPE decking but is instead made from 100% bamboo, the strongest most rapidly renewable wood on Earth.

BamWood is the Green choice in outdoor decking. Compared to other deck materials such as cedar, redwood, or pressure treated, BamWood is stronger and more durable without sacrificing beauty or functionality.

BamWood is termite resistant, weather tested, completely green, LEED qualified, and priced similarly to standard decking options.

Features

- Environmental friendly
- Moisture / Water resistant
- Termite and insect proof
- Easy to install and clean
- Weather resistant, suitable from -40°F – 140°F
- Requires no painting or glue and is low maintenance
- Barefoot-friendly, anti-slip, no cracking, and no warping
- Looks like real wood but made with Bamboo



Installation


BamWood simple and easy groove and groove system with fasteners makes installation a breeze!

– Fast and easy installation above level concrete, tamped-down sand/gravel, roofing, or existing decking.



ECO-Friendly

BamWood even tests well below E1 indoor environmental emission standards and is sealed with a 100% soy based oil for outdoor protection.

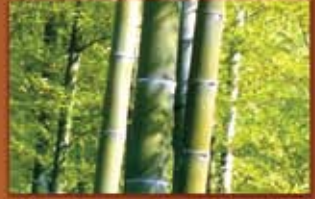

Backed up by a residential and commercial warranty against finish wear-through, this revolutionary solution allows you to sit back and enjoy your outdoor life as time goes by. To ensure continued client satisfaction by supplying durable and stable high quality Bamboo products, we always use the highest quality raw materials.



Maintenance

Maintenance only requires a coating of tug oil in every 3 months, which will help in maintaining the surface color.

Condition of BamWood without Maintenance

When surface is not polished with tug oil



Product Specification

FACE WOOD



Name of Wood : Compressed Bamboo Wood
Size of (1) Piece : 1870mm (Length) x 140mm (Width) x 20mm (Thickness)
Weight : 6.3 Kg/piece
Surface : Teak Wood
Quality : Rated No. 1 Quality in Out Door Flooring

SUB WOOD



Name of Wood : Compressed Bamboo Wood
Size of (1) Piece : 2200mm (Length) x 70mm (Width) x 42mm (Thickness)
Weight : 4.53 Kg/piece
Surface : Oiled & Anti-Water Glue
Quality : Rated No. 1 Quality is Wood Sub Flooring

ACCESSORIES



Stainless Steel Screw : 1 and 4 inches



Stainless Steel Plates

How it's made

Manufactured from 5 year old organically grown moso bamboo forged into an incredibly unique process of compressing and intertwining the fibers, a dense, "fossilized" bamboo block is formed.

This fossilized block of bamboo is then milled using precision laser guided machines before the final scratch-resistant curing phase. Beautiful, durable, easy to install, and made from the strongest, most environmentally sustainable wood on Earth, BamWood adds a new dimension to decking. The Decking undergoes a state of the art compression and sealing process, with No Urea Formaldehyde added to its glues.



Original Bamboo



High-Temperature Carbonization



Boiling



Pressing Line




Operating Line



High Standard Lacquering Line

Projects Completed in Pakistan

LARGEST WOODEN BOARD WALK IN ASIA AT SHAHEED BENAZIR BHUTTO PARK, BOAT BASIN - KARACHI.

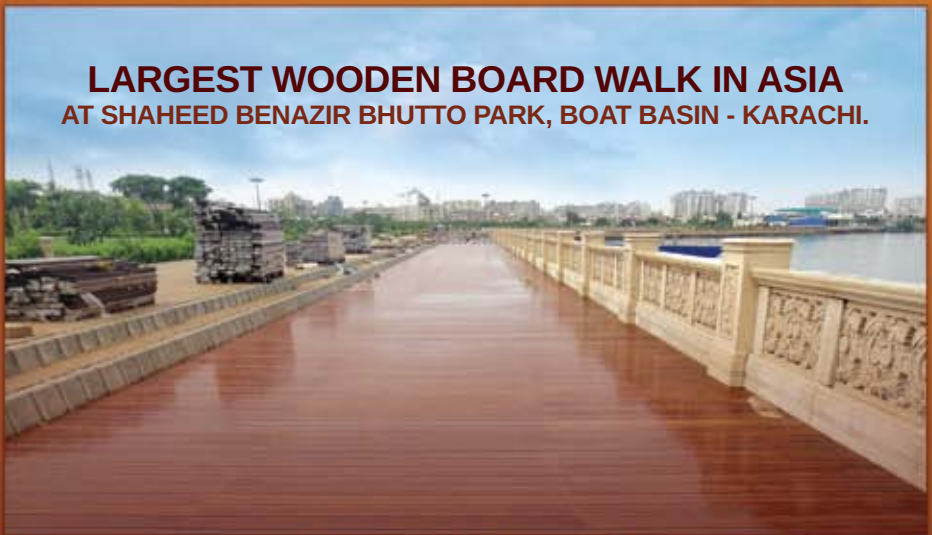

Head Office: 3rd Floor, Plot No. 84-C, 21st Commercial Street, Main Khayaban-e-Ittehad, Phase II Ext. DHA. Karachi - Pakistan.

Tel.: (92-21) 35887168, **Fax:** (92-21) 35387295

Web: www.sarg.pk, **Email:** bamwood.sarg@gmail.com